
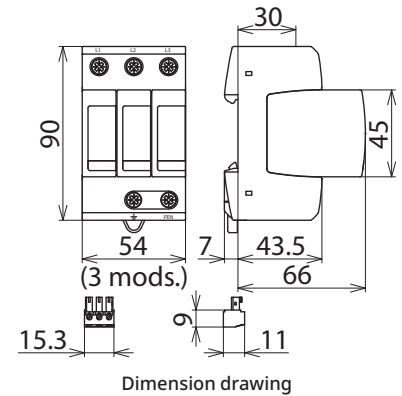


DG M TNC 275 FM (952 305)

- Prewired complete unit consisting of a base part and plug-in protection modules
- High discharge capacity due to heavy-duty zinc oxide varistors / spark gaps
- High reliability due to „Thermo Dynamic Control“ SPD monitoring device



Modular surge arrester for use in TN-C systems; with floating changeover contact.

Type	DG M TNC 275 FM
Part No.	952 305
Technical data	
SPD according to EN 61643-11 / IEC 61643-11	type 2 / class II
Energy coordination with terminal equipment (≤ 10 m)	type 2 + type 3
Nominal voltage (a.c.) (U_n)	230 / 400 V (50 / 60 Hz)
Max. continuous operating voltage (AC) (U_c)	275 V (50 / 60 Hz)
Nominal discharge current (8/20 μ s) (I_n)	20 kA
Max. discharge current (8/20 μ s) (I_{max})	40 kA
Voltage protection level (U_p)	≤ 1.5 kV
Voltage protection level at 5 kA (U_p)	≤ 1 kV
Response time (t_A)	≤ 25 ns
Max. mains-side overcurrent protection	125 A gG
Short-circuit withstand capability for max. mains-side overcurrent protection (I_{scCR})	50 kA _{rms}
Temporary overvoltage (U_T) – characteristic	335 V / 5 sec. – Festigkeit 440 V / 120 min. – sicherer Ausfall
Operating temperature range (T_U)	-40 °C ... +80 °C
Operating state / fault indication	green / red
Number of ports	1
Cross-sectional area (min.)	1.5 mm ² solid / flexible
Cross-sectional area (max.)	35 mm ² stranded / 25 mm ² flexible
For mounting on	35 mm DIN rails acc. to EN 60715
Enclosure material	thermoplastic, red, UL 94 V-0
Place of installation	indoor installation
Degree of protection	IP 20
Capacity	3 Standard DIN module, DIN 43880
Approvals	KEMA, VDE, UL
Type of remote signalling contact	changeover contact
Switching capacity (a.c.)	250 V / 0.5 A
Switching capacity (d.c.)	250 V / 0.1 A; 125 V / 0.2 A; 75 V / 0.5 A
Cross-sectional area for remote signalling terminals	max. 1.5 mm ² solid / flexible
Masterdata	
Net weight	327.8 g/pc(s)
GTIN	4013364108448
PU	1 pc(s)
Customs tariff number (Comb. Nomenclature EU)	85363030

We reserve the right to make changes to the design and technology, dimensions, weights and materials in the interests of technical progress. The illustrations are not binding.